


ARC Audio Breakout

Description

Our ARC11 has been designed to extract audio from the HDMI ARC (Audio Return Channel) of a display. Featuring both an analogue audio, and optical audio output, it can extract the embedded ARC audio information for use within a multi room audio distribution system.

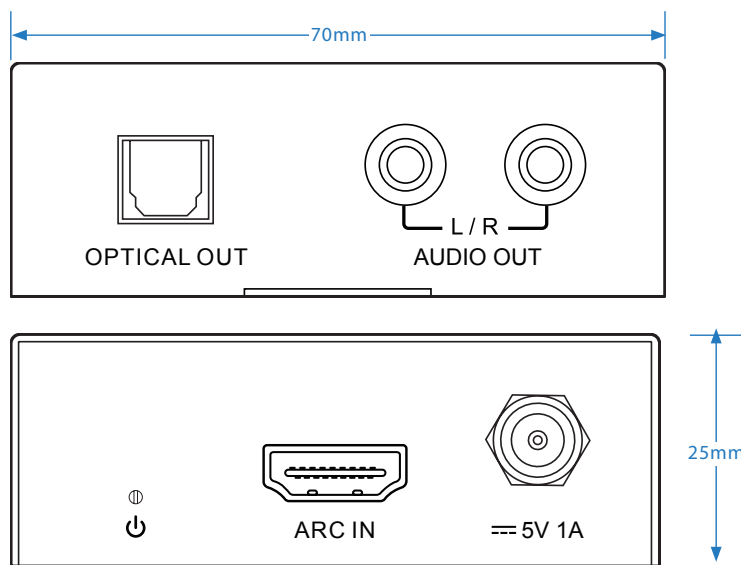

Key Features

- Extracts audio from the Audio Return Channel of a HDMI signal
- Features analogue audio breakout of 2ch PCM audio signals, where source audio is 2ch PCM
- Features optical audio breakout of multi-channel and 2ch audio formats
- Supports pass through of 5.1 surround sound to Optical or 2 channel to analogue and optical outputs

Specifications

- **Audio Input Connectors:** 1 x HDMI Type A, 19-pin, female
- **Audio Output Connectors:** 2 x RCA analogue left / right, 1 x Toslink optical output
- **Casing Dimensions (W x H x D):** 70mm x 25mm x 73mm
- **Shipping Weight:** 0.4kg
- **Operating Temperature:** 32°F to 104°F (-5°C to +55°C)
- **Storage Temperature:** -4°F to 140°F (-25°C to +70°C)
- **Power Supply:** 5V/1A DC USB



Included Accessories

Rack Mount	1 x Mounting Kit
Power Supply	5V/1A DC USB PSU

Regulatory Compliance

