

4x4 USB 3.0 KVM Matrix




Description

Our 4x4 USB 3.0 KVM Matrix offers unprecedented performance and value for the custom and commercial installation market.

The MX44KVM is a USB 3.0 Matrix package allowing 4x USB peripheral devices to be shared between 4x host devices, supporting plug-and-play capabilities, and USB data transfer rates up to 5Gbps.

The Matrix provides advanced features including cascading of multiple MX44KVM units, GPIO functionality for 3rd party product triggers, an in-built web browser interface module for control and configuration of the Matrix, along with RS-232 for seamless control integration.

An RS-232 loop-through connection allows for the MX44KVM to be intrinsically linked to any Blustream video matrix product for the addition of KVM support to our video-only switching products.

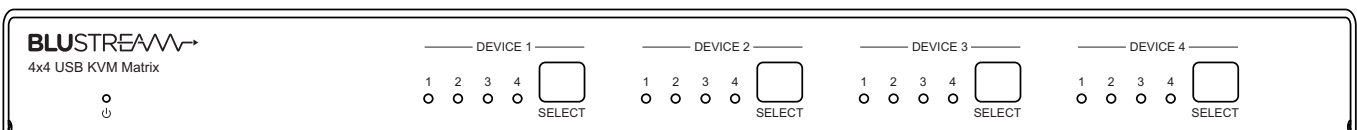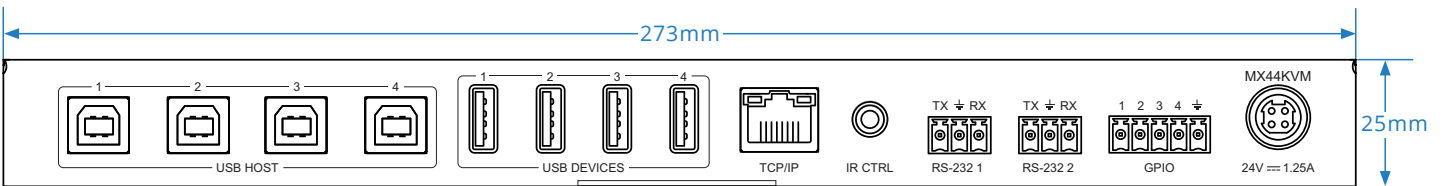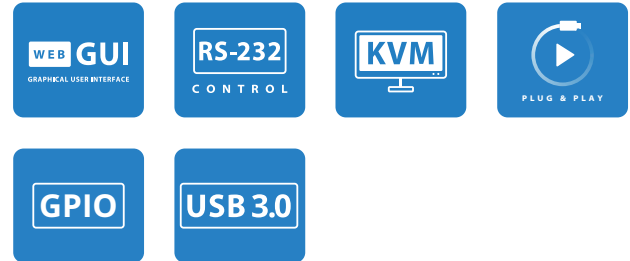

Key Features

- 4x4 USB KVM Matrix allowing up to 4x USB peripheral devices to be shared between 4x host devices
- USB 3.0 connectivity with data transfer rates up to 5Gbps
- Backwards compatible with USB 2.0 and 1.1
- Plug-and-play with no drivers, downloads, or software required
- USB-A connections provide 5V 900mA
- Features 4x configurable GPIO ports for integration with 3rd party products
- Features RS-232 loop-through for repetition of incoming RS-232 commands to additional Blustream products
- Assignable inputs and outputs allowing automated switching when used with existing Blustream Matrix products
- Web interface module for control and configuration of the MX44KVM
- Control via front panel, IR, RS-232, and TCP/IP

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.



Specifications

- Dimensions (W x D x H): 273mm x 168mm x 25mm
- Shipping Weight: 2.65kg
- Operating Temperature: 32°F to 104°F (-5°C to +55°C)
- Storage Temperature: -4°F to 140°F (-20°C to 60°C)
- Power Supply: 24V/1.25A DC, 4-pin DIN connector

Connectivity

- USB Device: 4 x USB Type A female
- USB Host: 4 x USB Type B female
- USB Hops: 1 x USB hop / tier for this unit
- RS-232 serial port: 2 x 3-pin Phoenix connector
- IR Input port: 1 x 3.5mm stereo jack
- TCP/IP Control: 1 x RJ45, female
- GPIO Control: 1 x 5-pin Phoenix connector

Included Accessories

Power Supply	1 x 24V/1.25A DC
IR Accessories	1 x 3.5mm Stereo Jack

Regulatory Compliance



Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.